

DATA SHEET

B2800B/3M/50 TECH PRO


S-28DA504FPS139



UNIT DIMENSIONS



PACKAGE DIMENSIONS

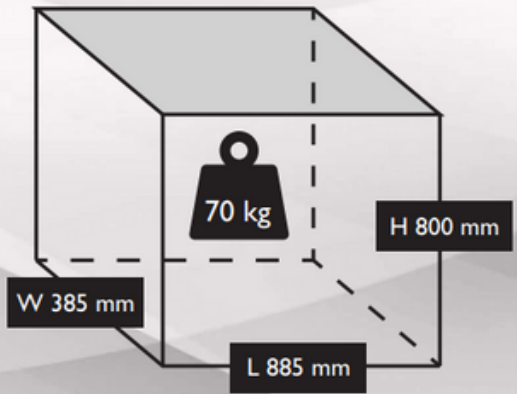

TECHNICAL DATA

	Max. Pressure	10 Bar / 145 PSI
	Power	3.0 HP / 2.2 kW
	Capacity (displacement)	12.5 CFM / 355 L/Min
	Voltage	230 V / 50 Hz
	Supply	13 Amp Plug
	FLC	13
	Pump	B28B PRO (28000IB)
	dB(A)	76
	Dimensions L x W x H (unit)	875 x 375 x 790 mm

	Dimensions L x W x H (boxed)	885 x 385 x 800 mm
	Weight	70 kgs
	Motor Speed	2850 RPM
	Oil Capacity	0.5 Ltr
	Receiver Size	50 Ltr
	Head Bolt Torque	27 Nm
	Cable Length	2 Mtr
	Pump Speed	1250 RPM
	Outlet Thread Size	Series 25 Coupling



TECH PRO Series - Belt Drive



TECH PRO SERIES

Specially designed for maximum convenience, easy manoeuvrability and with a special control panel that is home to instruments, controls and instant air outlets. Featuring highly proven Genuine B2800B and B3800B compressor pump units which offer premium features, long life and ease of use. The B3800B version provides extremely high output, very low speed and quieter operation. All models feature a twin capacitor electric motor for easy starting and improved reliability. All models operate from a 230 V power supply with a 110 V version also available.

“Unique “Tech” Control Panel / Larger Wheels & Handles / Genuine B2800 and B3800 pump units”

Newly developed silencing solution

Advanced cooling system

Air after cooler - Cooler air outlet

Genuine B2800 compressor unit

Durable single stage lubricated design

Larger wheels for extra portability

Automatic stop/start control

High quality twin capacitor electric motor


Large handle for ease of use

TECH PANEL - convenience and simplicity

Instant air connections (x2)

Two castors for maximum portability

Convenient condensate drain

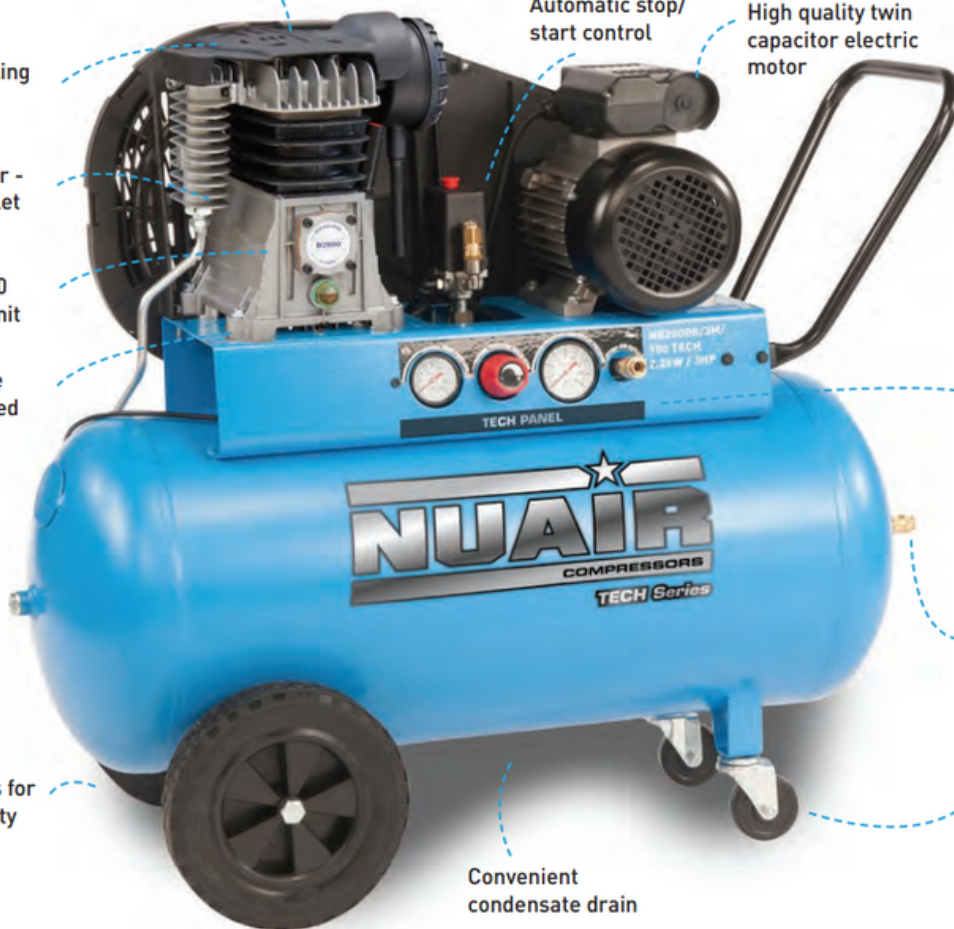

Belt Driven Lubricated - Tech Pro Series Portable 1.5 to 2.2 kW

Code	Model	Type	Control	Rec		Motor		Capacity***		Pressure		Dimension		Kg
				L	V	kW	HP	L/min	CFM	Bar	Psi	LxWxH (mm)		
S-28DA404FPS138	B2800B/2M/50 TECH-PRO UK	Portable	DOL	50	230	1.5	2	255	9	10	145	875x375x790	50	
S-28DA504FPS139	B2800B/3M/50 TECH-PRO UK	Portable	DOL	50	230	2.2 (13 amp)	3	355	12.5	10	145	875x375x790	54	
S-28FA504FPS134	B2800B/3M/100 TECH-PRO UK	Portable	DOL	100	230	2.2 (13 amp)	3	355	12.5	10	145	1070x385x840	72	
S-28HA504FPS135	B2800B/3M/150 TECH-PRO UK	Portable	DOL	150	230	2.2 (13 amp)	3	355	12.5	10	145	1390x430x950	88	
S-28LA504FPS136	B2800B/3M/200 TECH-PRO UK	Portable	DOL	200	230	2.2 (13 amp)	3	355	12.5	10	145	1390x430x950	101	
S-36FA504FPS148	B3800B/3M/100 TECH-PRO UK	Portable	DOL	100	230	2.2 (13 amp)	3	370	13.06	10	145	1070x385x840	73	

Genuine 13 amp supply on all TECH Series - All capacity figures are quoted as CFM Displacement